

FORMA 800 TUNNEL

WITH FLA3+ 590 AUTOMATIC BEV[®] BURNER

Net Zero fireplace with the BEV Technology[®]

AUTOMATIC BEV[®] BURNER

The automatic burner with the patented BEV Technology[®] is the most advanced product in the industry ensuring the cleanest burning process without any smoke, smell or ash. The flame is produced by combusting ethanol vapours and has no direct contact with the liquid fuel.

PROTECTIVE DEFLECTOR

With the attached deflector you can cover the fireplace housing with combustible materials.

FLAME CONTROL

Have control over the fire and take advantage of the 6-stage flame height regulation.

TRUE ZERO CLEARANCE

The feature that allows you install the fireplace in a housing construction made of combustible materials.



AUTOMATIC REFILLING SYSTEM

The automatic pump communicates with the device, delivering the necessary amount of fuel. There is no risk of overfilling the tank or spilling the fuel.

REMOTE CONTROL

Control the fire with the included remote, app on your smartphone or home automation system.

INTEGRATED CONTROL PANEL

The burner has an intuitive control panel and inlet for automatic refuelling.



BEST BUILD QUALITY

The product passed extensive tests carried out by the leading certification institutes. It is manufactured according to UL standards and is O-TL certified, meeting the most demanding safety and quality requirements.

Forma 800 Tunnel

Burner model	FLA3+ 590 (BEV Technology®)
Fuel tank capacity	9.6 L
Maximum burn time	19 hours
Maximum heat output	3.1 kW
Minimum room cubature	31 m ³
Flame height regulation	6 stages
Weight	61.2 kg
Fuel type	bioethanol 95 - 96,6%
Flue	not required
Air change rate	1 space volume per hour
Power supply	230 V
Finish	black powder coating
Materials	steel, galvanized steel, toughened glass
Application	for indoor use only

CONTROL OPTIONS



included



included



optional


'FLA3 NET-ZERO' APP

Control the fire with your smartphone!



OPTIONAL DECORATIVE TRAY


Decorative tray with 1 ceramic log or white stones installed on the burner, behind the fireline.



O-TL certified



Manufactured to UL standards

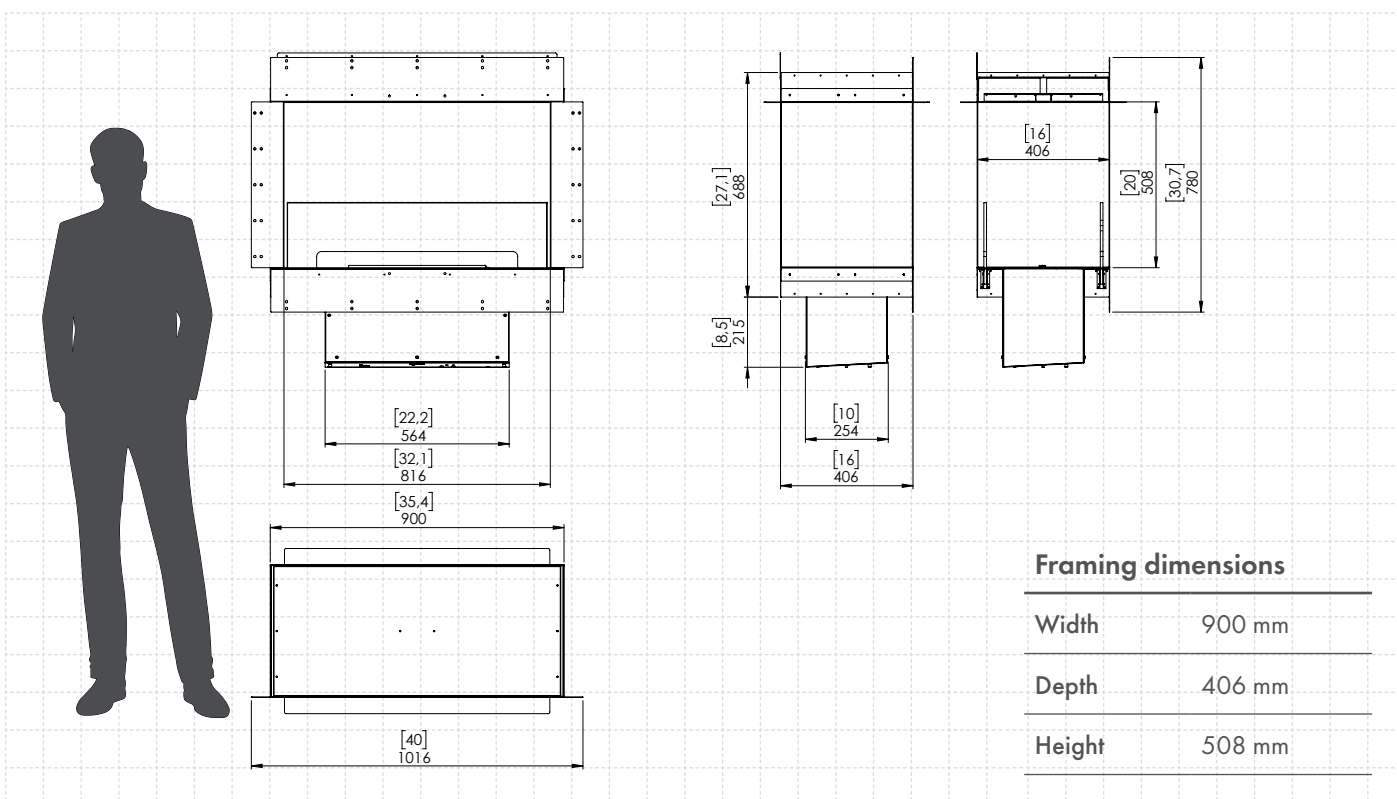

Framing dimensions

Width	900 mm
Depth	406 mm
Height	508 mm